




Features&Benefits

- The channels are welded directly to the wire and are available in standard or inverted U shape, flared or inverted flared or flat mesh with our channels using reinforcement wires for additional capacity.
- Easy to install, simply drops into place.
- Meets fire codes.
- Increases overhead sprinkler effectiveness.
- Better inventory visibility.
- Allows storage of variable pallet/load sizes.
- Provides strength, safety and cleanliness for bulk storage environment.

Model	Wire Guage	Mesh Size	Channel (pcs)	Flared Channel Thickness	U. D. L Capacity
	GA	Inch		GA	#
24"×46"	4	2.5×4.5	3	13	2800
36"×46"	4	2.5×4.5	3	13	2500
42"×46"	4	2.5×4.5	3	13	2100
44"×46"	4	2.5×4.5	3	13	2000
48"×46"	4	2.5×4.5	3	13	1800
36"×52"	4	2.5×4.5	4	13	2500
42"×52"	4	2.5×4.5	4	13	2500
44"×52"	4	2.5×4.5	4	13	2500
48"×52"	4	2.5×4.5	4	13	2500


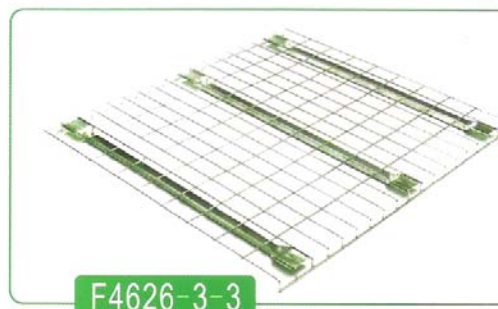


Crossbar across beams provide extra support for pallets, giving improved capacity and stability.

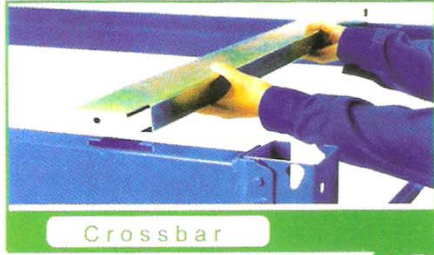

Crossbar

Dimension	Steel Guage (GA)	Total Weight (LBS)
42 x3	14	5.88
44 x3	14	6.17
48 x3	14	6.74

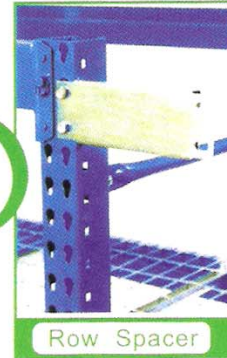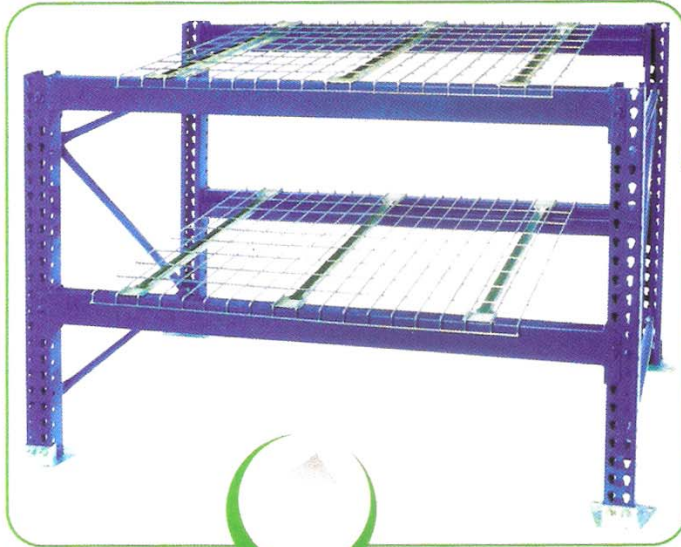


Row Spacer

Row Spacers are used to connect each row of pallet rack (back to back) to fix spacing between rows

Dimension	Steel Guage (GA)	Total Weight (LBS)
08"	14	1.78
12"	14	2.38
14"	14	2.67



Hanging Divider

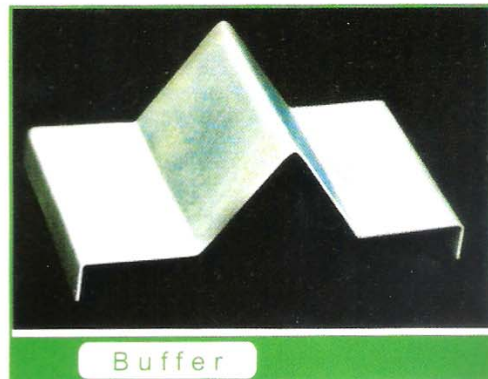

Buffer

※ CUSTOM SIZE AVAILABLE